CREATIVE DISPLAY

AVAILABILITY FOR RENTAL & WALL-MOUNTED

JUPITER SERIES

Pixel Pitch:1.5/1.9/2.6/2.9/3.9mm(Indoor)2.9/3.9/4.8mm(Outdoor)

CASE

JUPITER SERIES

Availability for rental & wall-mounted

Fully front maintenace of PSU, HUB and receiving card enables you to wall-mounted your leddisplay in suitable scenarios. With it's multiple installation, Jupiter will unlock your LED rental bussiness with new possibilities!

Application:

Broadcast/XR Stage

Live Music

Public Events

Corporate Event

Esports

Auto Show

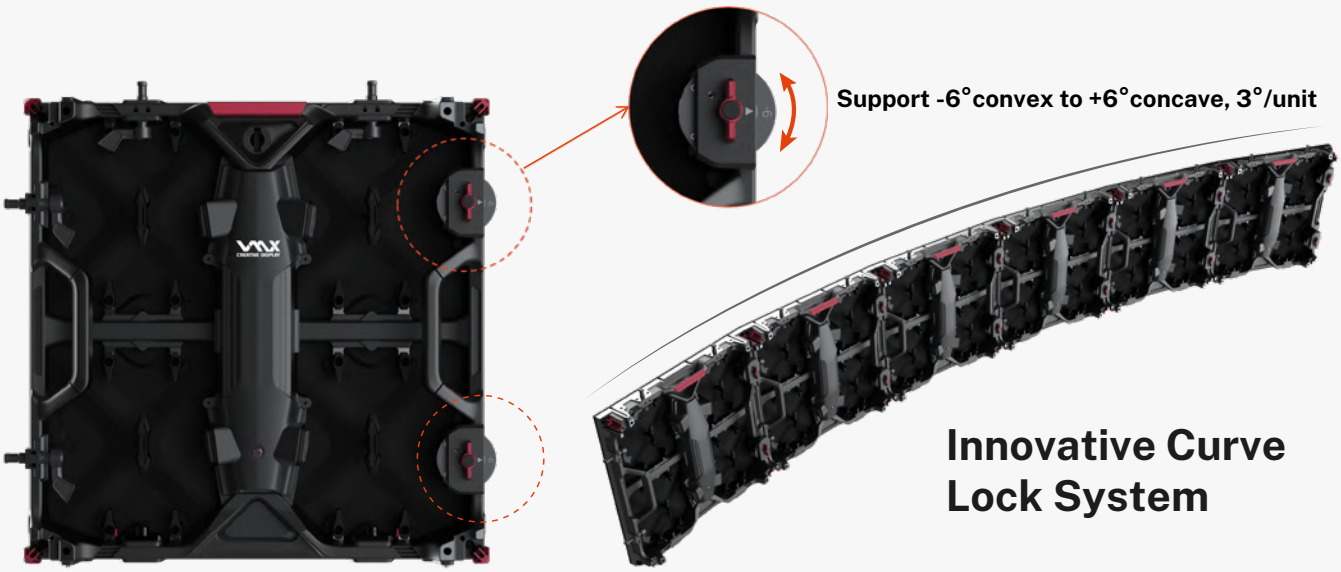

Innovative Curve Lock System

Lightweight Design

Bring rapid installation & maintenance and reduce the labor cost during transportation to the greatest extent.

Cabinet Size500x500mm

Indoor: ≤7.5kg/pcs

Outdoor: ≤8kg/pcs

Modular Design

Save the installation space and integrate with the whole room environment, bringing better visual enjoyment.

Floor Display Available

No need to install a guide rail, ideal for temporary rental

Mixed Splice

500*500 and 500*1000 cabinets can be easily spliced up and down, greatly satisfying different location usage.

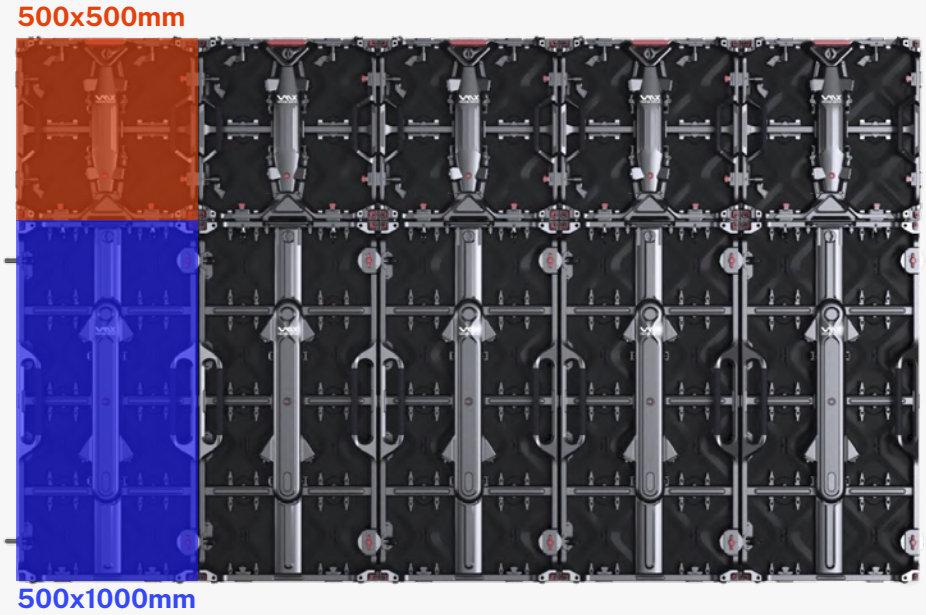

Multiple Installation Ways

HD

Support hanging, stacking and wall-mounted

SPECIFICATION

Jupiter (Indoor)	JP-151	JP-191	JP-261	JP-291	JP-391
LED Type	SMD	SMD	SMD	SMD	SMD
Pixel Pitch	1.5 mm	1.9 mm	2.6 mm	2.9 mm	3.9 mm
Max. Brightness	550 nit	880 nit	800 nit	800 nit	1000 nit
Cabinet Material	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum
Cabinet Dimensions	500x500x80 mm	500x500x80 mm	500x500x80 mm	500x500x80 mm	500x500/500x1000x80 mm
(LxWxD)	19.69x19.69x3.15”	19.69x19.69x3.15”	19.69x19.69x3.15”	19.69x19.69x3.15”	19.69x19.69/19.69x39.37x3.15”
Cabinet Resolution(HxV)	320x320	256x256	192x192	168x168	128x128/128x256
Weight Per Cabinet	7 kg/15.43 lbs	6.5 Kg/14.33 lbs	6.5 Kg/14.33 lbs	6.5 Kg/14.33 lbs	6.5 Kg/14.33 lbs/12 Kg/26.46 lbs
Gray Scale	14 bit	14 bit	14 bit	14 bit	14 bit
Refresh Rate	3840 Hz	3840 Hz	3840 Hz	3840 Hz	3840 Hz
Viewing Angle(H/V)	160°/160°	140°/140°	140°/140°	140°/140°	140°/140°
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21	IP40/IP21	IP40/IP21
Certificate	CE, ETL, FCC				

Jupiter (Outdoor)	JP-290	JP-390	JP-480
LED Type	SMD	SMD	SMD
Pixel Pitch	2.9 mm	3.9 mm	4.8 mm
Max. Brightness	4000 nit	4500 nit	4500 nit
Cabinet Material	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum
Cabinet Dimensions	500x500x80 mm	500x500/500x1000x80 mm	500x500/500x1000x80 mm
(LxWxD)	19.69x19.69x3.15”	19.69x19.69/19.69x39.37x3.15”	19.69x19.69/19.69x39.37x3.15”
Cabinet Resolution(HxV)	168x168	128x128/128x256	104x104/104x208
Weight Per Cabinet	8 Kg/17.64 lbs	8 Kg/17.64 lbs/12.5 Kg/27.55 lbs	8 Kg/17.64 lbs/12.5 Kg/27.55 lbs
Gray Scale	14 bit	14 bit	14 bit
Refresh Rate	3840 Hz	3840 Hz	3840 Hz
Viewing Angle(H/V)	160°/140°	140°/140°	140°/140°
IP Rating (Front/Rear)	IP65/IP54	IP65/IP54	IP65/IP54
Certificate	CE, ETL, FCC		

JP SERIES

CREATIVE DISPLAY

www.vmxvisual.com

Shenzhen VisionMax Technology Co., Ltd.

Web: www.vmxvisual.com **Tel:** +86-755-2324 5562 **Email:** sales@vmxvisual.com

Address: Building 1B, Jianfa Yuefu Plaza, Fenghuang Street,Guangming District, Shenzhen, Guangdong, China